



CST 100/120 ALUMINUM

FEATURES

- Robust conception with strong chrome-plated guiding bars
- Tilting rail
- Aluminium parts
- Folding legs and transport wheels
- Rubber layered table
- Delivered with a side extension without leg (450 x 300mm)

BENEFITS

- Reliable machine with high precision cutting
- Allows cuts up to 45°
- Light weight machine
- Easy to move and transport
- Anti-slip table for a well maintained material
- Width of the table grows from 660 to 960mm



CST100 ALU



CST120 ALU



CST100 ALU




CST120 ALU

Item No.	70184601937	70184602016	70184602124	70184602125
Supply Voltage/ Power	230V 1~/ 2,2kW (3 Hp)	230V 1~/ 2,2kW (3 Hp)	115V 1~/ 1,8kW (2,4 Hp)	115V 1~/ 1,8kW (2,4 Hp)
Fuse (Generator)	16A / 6kVA	16A / 6kVA	16A / 6kVA	16A / 6kVA
Blade x bore	Ø 350x25,4mm	Ø 350x25,4mm	Ø 350x25,4mm	Ø 350x25,4mm
Tool speed RPM	2800 min ⁻¹	2800 min ⁻¹	2800 min ⁻¹	2800 min ⁻¹
Max. cutting depth	110mm	110mm	110mm	110mm
Max. cutting length	1000mm	1200mm	1000mm	1200mm
Max. material height	130mm	130mm	130mm	130mm
Table size	1120mm	1310mm	1120mm	1310mm
Hand Arm Vibrations	< 2,5 m/s ²	< 2,5 m/s ²	< 2,5 m/s ²	< 2,5 m/s ²
Sound power / pressure level	88,5dB (A) / 73,5dB (A)	88,5dB (A) / 73,5dB (A)	88,5dB (A) / 73,5dB (A)	88,5dB (A) / 73,5dB (A)
Dimensions (LxWxH)	1530 x 660 x 1350mm	1630 x 660 x 1350mm	1530 x 660 x 1350mm	1630 x 660 x 1350mm
Dimensions (without legs)	1530 x 660 x 880mm	1630 x 660 x 880mm	1530 x 660 x 880mm	1630 x 660 x 880mm
Weight	85kg	90kg	85kg	90kg

PRODUCT FEATURES



MAX CUT DEPTH - CST 100

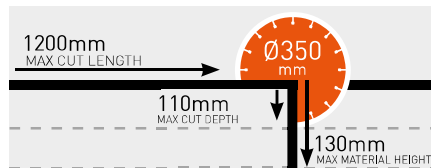

MAX CUT DEPTH - CST 120



TILTING HEAD



SIDE EXTENSION AND CUTTING GUIDE INCLUDED (450x300mm)



EASY TRANSPORT THANKS TO FOLDING LEGS AND WHEELS

